4 ZONE INDUCTION RANGE ON OPEN CUPBOARD

Project: .....
Rev.: .....
Zone: .....
Location: .....

CODE	MODEL	SERIE
CR1012929	Q70PCV/IND800	QUEEN 7

GENERAL FEATURES

- 15/10 worktop thickness
- Stainless steel, Scotch-Brite finish
- Sturdy and powerful with compact design
- Depth of 700 mm means it will fit the most common configurations
- Catalogue offers more than 300 standard models
- Worktop, base cabinet, base cabinet with doors and oven versions
- Twin-piece knobs prevent the infiltration of dirt and are watertight
- Gas ranges having burners with various configurations and power ratings: 3,5 kW - 5,7 kW e 7 kW
- Wide range of accessories

The front bar is a new design feature that increases the kitchen's visual importance and offers clear benefits: it is a comfortable place for the chef to lean on; it means you will remain at a safe distance from the worktop and therefore protects from accidentally knocking against both items lying on the worktop and the knobs.

TECHNICAL DETAILS

4 ZONE INDUCTION RANGE ON OPEN CUPBOARD
- Watertight shatterproof glass-ceramic top.
- Cooking zones marked with a 23 cm diameter circular screenprint.
- 3,5 kW single zone power.
- Presence detector device and overheat device.
- Heat mode activity indicator light.

BARON Ali Group srl Via del Boscon, 424 32100 Belluno - Italy Tel. +39 0437 855411 Fax +39 0437 855444 info@baronprofessional.com www.baronprofessional.com

4 ZONE INDUCTION RANGE ON OPEN CUPBOARD

CODE	MODEL	SERIE
CR1012929	Q70PCV/IND800	QUEEN 7

TECHNICAL INFORMATION

SPECIFICATIONS	DATA
CODE	CR1012929
DEFINITION	Q70PCV/IND800 INDUZIONE M80 A/G
COMMERCIAL LINE	QUEEN
SUPPLY	ELETTRICA
WIDTH	800 MM
DEPTH	700 MM
HEIGHT	870 MM
NET WEIGHT	113,000
VOLUME	0,487 M3
PACKAGING LENGTH	850,000
PACKAGING WIDTH	850,000
PACKAGING HEIGHT	1150,000
PACKAGING VOLUME	0,831
PACKAGING GROSS WEIGHT	126,000
POWER SUPPLY VOLTAGE STANDARD	400V 3
FREQUENCY	50/60 Hz
ELECTRIC POWER	14,000 KW
IPX PROTECTION	IPX4
CERTIFIED MODEL	Q70PCV/IND800
CERTIFICATION NUMBER	-

4 ZONE INDUCTION RANGE ON OPEN CUPBOARD

CODE	MODEL	SERIE
CR1012929	Q70PCV/IND800	QUEEN 7

ACCESSORIESES

CODE	MODEL	DESCRIPTION
CR1018819	QP14	PORTINA PER BASE L=200
CR1018829	QP13	PORTINA PER BASE L=300
CR1018839	QP12	PORTINA PER BASE L=400
CR1012109	QP15	DOOR L= 500
CR0985539	ZL70	INOX SIDE PLINTH 700 SERIE
CR0592770	ZA40	FRONT PLINTH
CR0985539	ZL70	INOX SIDE PLINTH 700 SERIE
MA97432000	NXR	CASTORS KIT
MA97433000	NXRI	CASTORS KIT
CR0990359	CH20	DIRECTABLE WATER FLUE
CR0980009	CANT	TUBULAR HANDRAIL FRONTALE (AL METRO LINEARE)
CR0980019	9CLAT	TUBULAR HANDRAIL LATERALE SERIE 900
CR0980029	18CLAT	DOUBLE SIDE TUBULAR HANDRAIL SERIE 900
CR1015229	Q70FTDX	END SIDE ELEMENT QUEEN7 - RIGHT
CR1015239	Q70FTSX	END SIDE ELEMENT QUEEN7 - RIGHT
CR1015249	Q70FT140	END SIDE ELEMENT QUEEN7 - PASSTROUGHT
BN418031900191	7PRD	PIANO LATERALE RIBALTABILE DESTRO
BN418031900440	7PFD	PIANO LATERALE FISSO DESTRO
BN418031900201	7PRS	PIANO LATERALE RIBALTABILE SINISTRO
BN418031900450	7PFS	PIANO LATERALE FISSO SINISTRO
BN418031900320	7TLD	TOP FINISHING END PIECE QUEEN7 - DX
BN418031900330	7TLS	TOP FINISHING END PIECE QUEEN7 - SX
BN418031900360	14TL	TOP FINISHING END PIECE QUEEN7 - PASS-TROUGHT
BN418031920420	FC2	REAR SPLASH-BACK (FALSE CHEMNEY)) L=20 cm
BN418031920430	FC4	REAR SPLASH-BACK (FALSE CHEMNEY)) L=40 cm
BN418031920490	FC6	REAR SPLASH-BACK (FALSE CHEMNEY)) L=60 cm
BN418031920440	FC8	REAR SPLASH-BACK (FALSE CHEMNEY)) L=80 cm
BN418031920450	FC10	REAR SPLASH-BACK (FALSE CHEMNEY)) L=100 cm
BN418031920460	FC12	REAR SPLASH-BACK (FALSE CHEMNEY)) L=120 cm
BN418031920470	FC16	REAR SPLASH-BACK (FALSE CHEMNEY)) L=160cm
BN418031920070	7RIP4	UNDERSHELF L=40 cm
BN418031920080	7RIP8	UNDERSHELF L=80 cm
BN418031920090	7RIP12	UNDERSHELF L=120 cm
BN418031920100	7RIP16	UNDERSHELF L=160 cm
BN418031920110		
BN418031920300		
BN418031920480		

BARON Ali Group srl Via del Boscon, 424 32100 Belluno - Italy Tel. +39 0437 855411 Fax +39 0437 855444 info@baronprofessional.com www.baronprofessional.com

4 ZONE INDUCTION RANGE ON OPEN CUPBOARD

CODE	MODEL	SERIE
CR1012929	Q70PCV/IND800	QUEEN 7

QUEEN

PRODUCT'S RANGE PLUS

Powers selectable between 10 different levels for delicate or express cooking

High power, option of whole-area coverage, automatic pan detection.

Safety sensor prevents overheating.

Thanks to the water jet ingress protection rating, awarded after passing specific tests, knobs and knob bezels can be washed at the end of the working day without affecting performance or safety.

The front bar is a comfortable place for the chef to lean on; it means you will remain at a safe distance from the worktop and therefore protects from accidentally knocking against both items lying on the worktop and the knobs.

BARON Ali Group srl Via del Boscon, 424 32100 Belluno - Italy Tel. +39 0437 855411 Fax +39 0437 855444 info@baronprofessional.com www.baronprofessional.com

4 ZONE INDUCTION RANGE ON OPEN CUPBOARD

CODE	MODEL	SERIE
CR1012929	Q70PCV/IND800	QUEEN 7

SCHEMA DI INSTALLAZIONE - INSTALLATION DIAGRAM - INSTALLATIONSPLAN - SCHÉMA D'INSTALLATION - ESQUEMA DE INSTALACION -INSTALLATIESCHEMA - IINSTALLATIONSRITNINGAR

MISURE IN mm - DIMENSIONS IN mm - ABMESSUNGEN IN mm
MESURES EN mm - MEDIDAS EN mm - MATEN IN mm

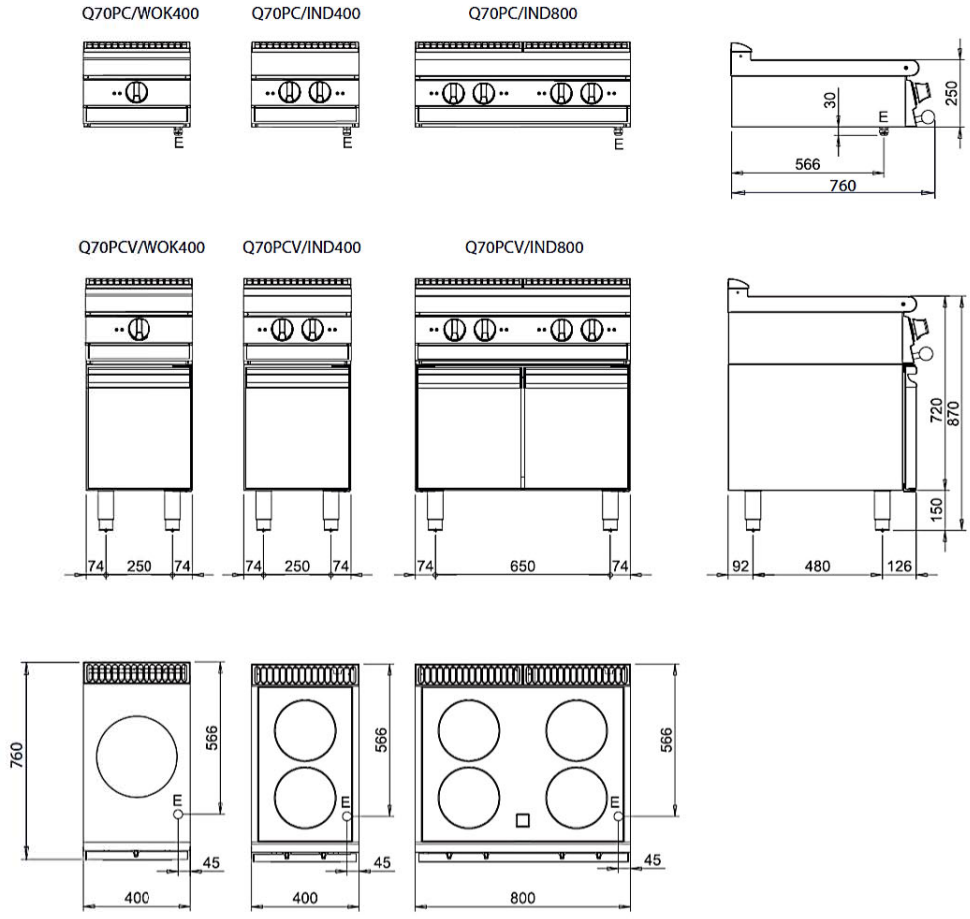

Legenda - Legende - Key - Légende - Leyenda - Legenda

E Pressacavo entrata linea elettrica - Stopfbuchse - Electric cable stress relief
Presse étoupe de câble él. - Pisacable - Elektrische kabelwartel

H2O* Attacco arrivo acqua - Wasseranschluss - Water inlet
Arrivée eau - Union de agua - Wateraansluiting
EN ISO 228-1 G 3/4

BARON Ali Group srl
Via del Boscon, 424
32100 Belluno - Italy
Tel. +39 0437 855411
Fax +39 0437 855444
info@baronprofessional.com
www.baronprofessional.com

Sistema Qualità Certificato ISO 9001:2015