

2 BASIN ELECTRIC DEEP FAT FRYER 20+20 LT

Project:
Rev.:
Zone:
Location:



CODE
CR1018449

MODEL
Q90FRI/E820

SERIE
QUEEN 9

GENERAL FEATURES

- AISI 304 stainless-steel bases and worktops, Scotch-Brite finish
- Depth of 900 mm for high power and performance
- Catalogue offers more than 350 standard models
- Worktop, base cabinet, base cabinet with doors and oven versions
- 20/10 worktop thickness
- Twin-piece knobs prevent infiltration of dirt and have an IPX5 water ingress protection rating
- Gas ranges having burners with various configurations and power ratings: 3.5 kW - 5.7 kW, 7 kW and 10 kW. Double-ring burners for 7 and 10 kW models
- Wide range of accessories

The knobs offer optimum grip and help the chef to have the setting controls right under his eyes. Special attention has also been paid to the knob bezel that has been expertly designed to avoid penetration of liquids and/or dirt. Thanks to the IPX5 water jet ingress protection rating, awarded after passing specific tests, knobs and knob bezels can be washed at the end of the working day without affecting performance or safety.



TECHNICAL DETAILS

ELECTRIC

2 BASIN ELECTRIC DEEP FAT FRYER 20+20 LT

- Fully moulded top, obtained from a single large stainless steel plate;
- Large capacity shaped cooking pots, with wide vertical expansion zone to avoid depositing of foam during loading;
- Automatic temperature adjustment thermostat up to 190°C;
- Fire-proof safety thermostat (230°C);
- Oil drain valves;
- Support for baskets and lids.
- Removable and lifting stainless steel armoured heating elements;
- Reached programmed temperature visual indicator;
- "Powered appliance" indicator light.

2 BASIN ELECTRIC DEEP FAT FRYER 20+20 LT



CODE
CR1018449

MODEL
Q90FRI/E820

SERIE
QUEEN 9

TECHNICAL INFORMATION

SPECIFICATIONS	DATA
CODE	CR1018449
DEFINITION	Q90FRI/E820 FRIGGITRICE EL.2V20+20LT M80
MODEL	Q90FRI/E820
COMMERCIAL LINE	QUEEN
SUPPLY	ELETTRICA
WIDTH	800 MM
DEPTH	900 MM
HEIGHT	870 MM
NET WEIGHT	129,800
VOLUME	0,626 M3
PACKAGING LENGTH	860,000
PACKAGING WIDTH	1020,000
PACKAGING HEIGHT	1150,000
PACKAGING VOLUME	1,010
PACKAGING GROSS WEIGHT	145,000
POWER SUPPLY VOLTAGE STANDARD	380-415V 3N
FREQUENCY	50-60 Hz
ELECTRIC POWER	36,000 KW
IPX PROTECTION	IPX5
CERTIFIED MODEL	Q90FRI/E820
CAPACITY	20 litri
TYPE	2 VASCHE
NUMBER OF MODULES	1/1 MODULO

2 BASIN ELECTRIC DEEP FAT FRYER 20+20 LT



CODE
CR1018449

MODEL
Q90FRI/E820

SERIE
QUEEN 9

ACCESSORIESES

CODE	MODEL	DESCRIPTION
CR0985519	CF10M	S/S BASKET FOR 7/10 LT FRYERS
BN418031940170	CF10	S/S BASKET FOR 10 LT FRYERS
BN418031940180	CF15	S/S BASKET FOR 15 LT FRYERS
BN418031940190	CF15P	S/S BASKET FOR 15 LT FRYERS
BN418031940200		
BN418031940210		
CR1353969	QCF22/23P	STAINLESS STEEL BASKET FOR FRYERS 22/23P LT
CR1353979	QCF22/23	STAINLESS STEEL BASKET FOR FRYERS 22/23 LT
CR0985529	GFF10M	BOTTOM GRID FOR FRYER TANK 10 LT
BN418031940140	GFF10	BOTTOM GRID FOR FRYER TANK 10 LT
BN418031940150	GFF15	BOTTOM GRID FOR FRYER TANK 15 LT
BN418031940160	GFF20	BOTTOM GRID FOR FRYERS 20 LT
CR0997189	9BRO	9BRO OIL TRAY
BN418031940080	CF 12M	LID FOR FRYERS 1/2 M
BN418031940090	CSFA FR	FLUE RISER WITH DOWNDRAUGHT DIVERTER

2 BASIN ELECTRIC DEEP FAT FRYER 20+20 LT

CODE
CR1018449

MODEL
Q90FRI/E820

SERIE
QUEEN 9

QUEEN


PRODUCT'S RANGE PLUS



Removable and lifting stainless steel armoured heating elements.



The tanks have a large spillage well and a cold zone at the bottom to collect food particles and prolong oil life.



Thanks to the IPX5 water jet ingress protection rating, awarded after passing specific tests, knobs and knob bezels can be washed at the end of the working day without affecting performance or safety.



The front bar is a comfortable place for the chef to lean on; it means you will remain at a safe distance from the worktop and therefore protects from accidentally knocking against both items lying on the worktop and the knobs.


2 BASIN ELECTRIC DEEP FAT FRYER 20+20 LT

CODE
CR1018449

MODEL
Q90FRI/E820

SERIE
QUEEN 9

MISURE IN cm - DIMENSIONS IN cm - ABMESSUNGEN IN cm - MESURES EN cm
MEDIDAS EN cm - MATEN IN cm - DIMENSIONES EN cm

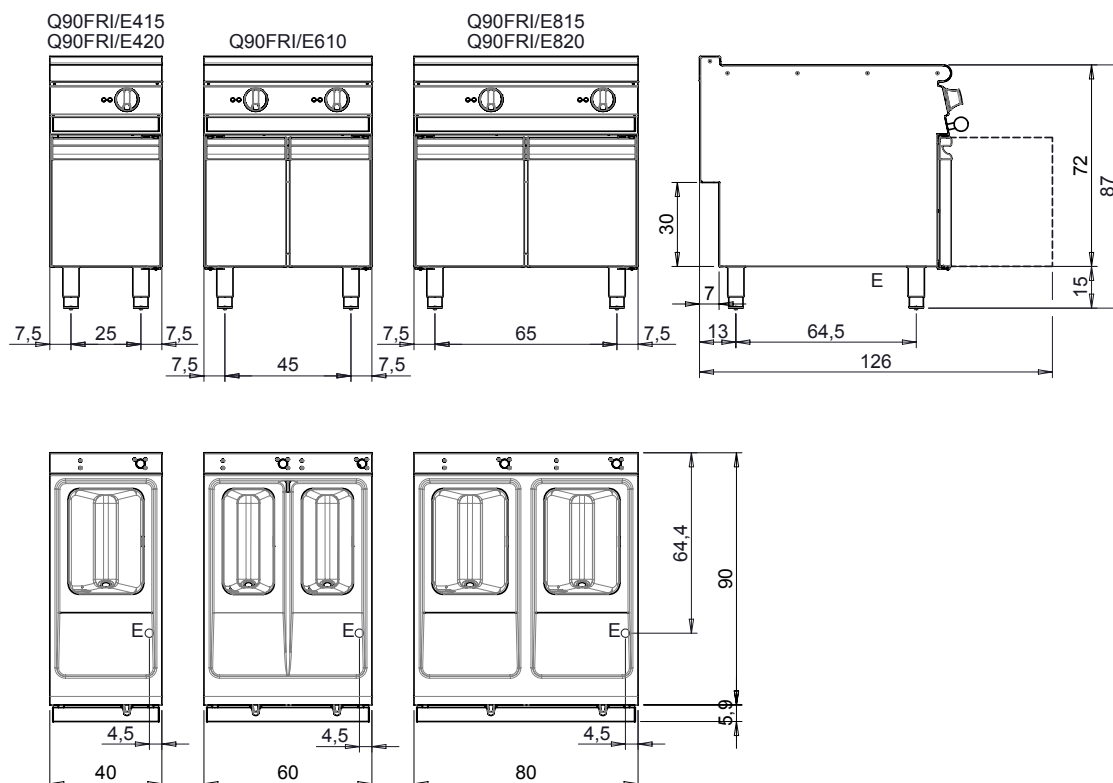

Legenda - Legende - Key - Légende - Leyenda - Legenda - Legenda

<p>E Pressacavo entrata linea elettrica - Stopfbuchse - Electric cable stress relief - Presse étoupe de câble él - Pisacable - Elektrische kabelwartel - Entrada cabo eléctrico</p>	<p>G Arrivo gas - Gasanschluss - Gas connection - Arrivée gaz - Union de gas - Gasaansluiting - Ligação gás</p>
<p>S Attacco scarico acqua - Wasserablauf - Water outlet - Vidange de l'eau - Desaguadero - Wateraftapaansluiting - Junção descarga água</p>	<p>H20 Arrivo acqua - Wasseranschluss - Water inlet - Arrivée eau - Union de agua - Wateraansluiting - Junção alimentação água</p>
<p>S1 Scarico vasca - Wannenabflussrohr - Pan outlet - Vidange du bac - Descarga cuba - Water toevoer - Descarga da cuba</p>	<p>A1 = Calda - Heiss - Warm - Chaude - Caliente - Warm - Morno A2 = Fredda - Kalt - Cold - Froid - Fria - Koude - Frio</p>
<p>S2 Valvola di depressione - Anti-depression valve - Unterdruck ventil - Soupape de dépression - Válvula de depresión - Onderdrukklep - Válvula de depressão</p>	<p>L Rubinetto di livello - Level tap - Wasserhahn - Robinet de niveau - Grifo de nivel - Niveaakraan - Torneira de nível</p>
<p>S3 Scarico acqua intercapedine - Wasserablauf Zwischenraum - Jacket water drain Evacuation eau double envelope - Descarga de agua intersticios - Afvoer water tussenruimte - Descarga de água na marmitta com Sistema de aquecimento indirecto</p>	
<p>S4 Scarico - Abflussrohr - Drain - Tuyau d'évacuation - Tubo de drenaje - Aftapbuis - Tubulação de dreno</p>	